

ESG320



Gateway3 4G 1SFP

Cloud-managed VPN Router with 4 x Gigabit (1x PoE+) Ethernet ports and one SFP slots

Overview

EnGenius ESG320 Cloud-managed VPN Router provides a high-performance network solution with advanced features, including load balancing, dual-WAN, and site-to-site VPN. The product offers unified management through EnGenius Cloud, allowing for easy configuration and management from anywhere. It offers a comprehensive end-to-end solution for businesses seeking to enhance their network performance and security.



Features & Benefits

- Simple, unified cloud management for any size business
- Intuitive and centralized device visibility from anywhere
- Dual GE WAN and Dual GE LAN for maximum performance
- Dual-core 2.1 GHz processor for greater speed and power
- Built-in load balancing and safeguards with dual-WAN and cellular failover
- PoE+ port to power up a Wi-Fi AP, IP camera or IP phone

- Stateful firewall with high-efficiency filtering and inspection to enhance security
- High-speed and secure site-to-site VPN and client VPN
- Quick self-healing VPN and VLAN setup for faster and easier deployments
- Touchless system maintenance and automatic updates
- Multiple passthrough and routing options
- Captive portal with external radius capabilities

1

Technical Specifications

CDLLD	
CPU Processor	
Dual Core	
Operating Frequency	
2.1GHz	
Memory	
4GB	
Flash Storage	
8GB	
RJ-45 Interface	
4x1G	
SFP interface	
1xSFP	
PoE ports	
1	
PoE Standard	
802.3 af/at	
I/O Interfaces	
1 x RJ-45 console/1 x USB 3.0	
Mounting Method	
Wall mount	
Security	
TPM	
Perfomance & Capacity	
Firewall (SPI throughput)	
· · · · · · · · · · · · · · · · · · ·	

VPN throughput	
900 Mbps	
Max. Concurrent VPN Tunnels	
100	
Max. Concurrent VPN Users	
50	
Max. TCP Concurrent Sessions	
1000000	

Max VLAN 16

Firewall	
Firewall Features	
Stateful Packet Inspection	
Policy Rules	
Port Forwarding	
1:1 NAT	
Allow Inbound Services	
Layer 7 Application Firewall	


Site-to-Site VPN	
Mesh VPN/ Hub-and-Spok	е
Encryption	
3DES, AES (256/192/128-b	oit)
Authentication	
MD5, SHA1, SHA2 (256-bit)
Key Managment	
IKEv1 (x-auth, mode-config	u)
IKEv2 (EAP, configuration p	payload)
VPN Features	
Site-to-Site VPN	
Client VPN(IPsec/SecuPoin	nt SSL)
Policy-based VPN	
IPSec NAT traversal (NAT-1	
Dead Peer Detection (DPD)	
Auto-VPN Connection	
Auto NAT traversal	

Site-to-Site VPIN	
Client VPN(IPsec/SecuPoint SSL)	
Policy-based VPN	
IPSec NAT traversal (NAT-T)	
Dead Peer Detection (DPD)	
Auto-VPN Connection	
Auto NAT traversal	
Networking	
Operation mode	
Routed / Passthrough	
Multiple WANs	
Dual	
Bandwidth Limit	
Per client/ Per Interface	
Traffic Load Balancing	
WAN load balancing with WRR	
Networking Features	
Static Route	
Multiple WANs	
USB Cellular	
User Authentication	
PPPoE	
VLAN Tagging	
Captive Portal	
Custom Splash Page	
Bandwidth Limit	
Traffic Load Balancing	
DHCP client/server/relay	
Dynamic DNS support	
Policy Based Routing	

Technical Specifications

Environmental & Physical	
Power	
54V/1.2A	
Operation Temperature	
0°C to 40°C	
Humidity (non-condensing)	
5 to 95% non-condensing	
Dimensions & Weight	
Dimensions	
Width: 210mm	
Length: 179.5mm	
Height: 35mm	
Package Contents	
Power adapter	
Power cord	
RJ-45 Console Cable	
Wall Mount Kit	
Product Card	
Compliance	
Regulatory Compliance	
FCC Part 15 (Class B)	
IC	
CE EMC	
СВ	
UI	

Hardware Overviews

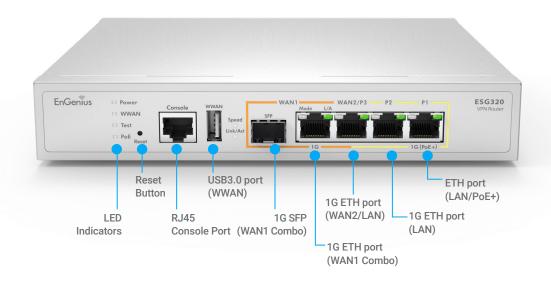

EnGenius Technologies | Costa Mesa, California, USA

Emaill: support@engeniustech.com
Website: www.engeniustech.com
Local contact: (+1) 714 432 8668

EnGenius Networks Singapore Pte Ltd. | Singapore

Emaill: techsupport@engeniustech.com.sg
Website: www.engeniustech.com.sg
Local contact: (+65) 6227 1088

EnGenius Technologies Canada | Ontario, Canada

Email: support@engeniustech.com
Website: www.engeniustech.com
Local contact: (+1) 905 940 8181

EnGenius Networks Dubai | Dubai, UAE

Emaill: support@engenius-me.com
Website: www.engenius-me.com
Local contact: (+971) 4 339 1227

EnGenius Networks Europe B.V. | Eindhoven, Netherlands

Email: support@engeniusnetworks.eu Website: www.engeniusnetworks.eu Use Local contact: (+31) 40 8200 887

恩碩科技股份有限公司 | Taiwan, R.O.C.

Email: support@engeniustech.com.tw
Website: www.engeniustech.com.tw
Local contact: (+886) 2 2652 1808

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense. Prior to installing any surveillance equipment, it is your responsibility to ensure the installation is in compliance with local, state and federal video and audio surveillance and privacy laws.

